

Digital Single Phase BLDC Hall In One Motor Driver

1. Description

The iT1300T is a single phase, brushless DC motor controller. It is composed of hall element, MOSFET, gate driver and control logic which can provide minimal components of total BOM to save total cost.

The iT1300T provides various parameters to tune motor efficiently and quickly, ex: poles, Lead Angel, target speed and PWM duty ...etc. All of the parameters shall be set via inergy's software "INGUI"

The iT1300T is equipped TSD, OCP, OVP, UVP, Lockout protections


2. Applications

BLDC motors and fans


3. Features

- Direct PWM control
- Embedded Hall Sensor
- Wide Range 3.5V to 16V Operating Input
- Integrated Power MOSFETs
- Programmable Speed Curve
- Adjustable Lead Angle $\pm 90^\circ$
- Adjustable Lockout Detection and Automatic Recovery
- Adjustable Silence Current Control
- Selectable FG/Alarm/RD Signal Output
- 1KHz~100KHz PWM Input Frequency Range
- 25K/50KHz Output Switching Frequency
- Cycle by Cycle Current Limit
- Selectable Open Loop and Close Loop
- Adjustable Input Duty and Output Duty Slope
- Soft Start and Kick Start
- TSD, OCP, OVP, UVP, and Automatic Recovery

4. Pin Assignments

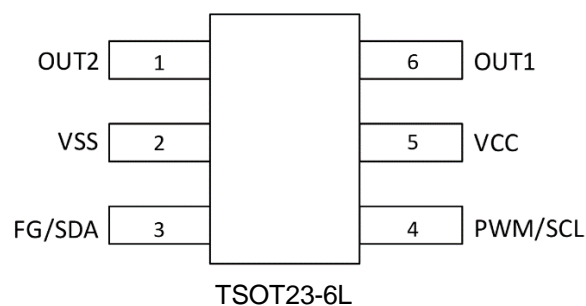


5. Marking Information

Ordering Code	Marking
iT1300T	 <p>X : Date code Y : Checksum □□ : Internal code</p>

6. Pin Definitions

Pin No.	Symbol	Description
1	OUT2	Driving motor output
2	VSS	Ground pin
3	FG/SDA	Speed signal output / SDA
4	PWM/SCL	Direct PWM input/ SCL
5	VCC	Power supply pin
6	OUT1	Driving motor output

7. Block Diagram

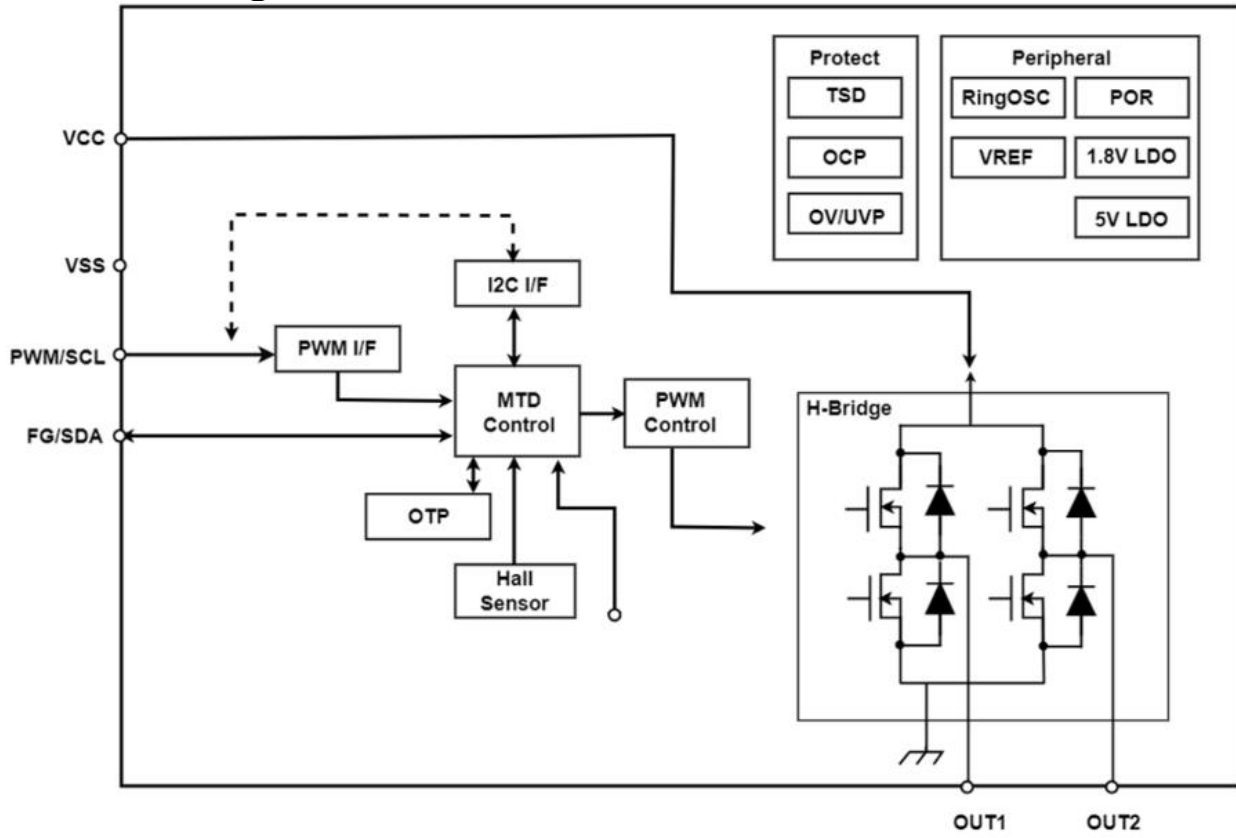

8. Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to GND, all currents are defined positive into any lead. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Parameter	Min	Max.	Unit
V _{CC}	Supply Voltage	-0.3	20	V
I _o	Output Current		1.2	A
P _D	Package power dissipation @ T _A ≤ + 25°C		0.65	W
V _{PWM}	PWM/SCL signal input voltage	-0.3	6	V
V _{FG}	FG/Alarm/RD signal output voltage	-0.3	18	V
I _{FG}	FG/Alarm/RD signal sink current		0.01	A
R _{thJA}	Thermal resistance, junction to ambient		192	°C / W
T _J	Junction temperature		150	°C
T _S	Storage temperature	-55	150	
T _L	Lead temperature (soldering 10 seconds)		260	

9. Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	Operating supply voltage	3.5	16	V
V _{PWM}	PWM input voltage	-0.3	5.5	V
V _{FG}	FG/Alarm/RD signal output voltage	-0.3	18	V
D _{PWM}	Duty of PWM input	0	100	%
F _{PWMIN}	Frequency of PWM input	1K	100K	Hz
T _A	Ambient temperature (*1)	- 40	125	°C

*1 Note : Please do not exceed T_j limitation


10. Electrical Characteristics

V_{CC}=12V, T_A = 25 °C, unless otherwise specified.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
I _{CC}	Circuit Current	V _{CC} =12V		6		mA
TH _{PG}	V _{CC} power good threshold		-15%	3	+15%	V
HYS _{PG}	V _{CC} power good hysteresis		0.1	0.4	0.6	V
TH _{OV}	V _{CC} over voltage threshold			19.5		V
HYS _{OV}	V _{CC} over voltage hysteresis			1		V
TH _{UV}	V _{CC} under voltage threshold			8		V
HYS _{UV}	V _{CC} under voltage hysteresis			1		V
TH _{tsd}	Thermal shutdown threshold		140	150	160	°C
HYS _{tsd}	Thermal shutdown hysteresis			25		°C
TH _{tam}	Thermal alarm threshold		115	125	135	°C
HYS _{tam}	Thermal alarm hysteresis			25		°C
V _{PWMH}	PWM input high voltage		2.6		5.5	V
V _{PWML}	PWM input low voltage		-0.3		0.8	
F _{PWM}	PWM input frequency		1		100	kHz
R _{PWM}	PWM input internal pull-up resistance			20		kΩ
R _{PWM}	PWM input internal pull-down resistance			800		kΩ
R _{on}	High side + Low side resistance	I _o =0.5A/V _{CC} =12V T _a =25°C		0.9		Ω
R _{FG}	Internal resistance of FG			20		Ω
I _{OC}	Over current threshold				1.2	A
I _{lim}	Output current limit range	0.2A/step	0.2		1.2	A
F _{osc}	Internal oscillator frequency		-5%	26	+5%	MHz
F _{PWM}	PWM output frequency		-5%	25	+5%	kHz
			-5%	50	+5%	
LA	Lead Angle		-90		+90	°
T _{locd}	Lockout detect time	0.25/0.5sec	-5%	0.25	+5%	sec
T _{lodr}	Lock recovery time	2.5/5/7.5/10sec	-5%	2.5	+5%	sec
B _{OP}	Operate magnetic field		15		35	Gauss
B _{RP}	Release magnetic field		-35		-15	Gauss
B _{HYS}	magnetic field hysteresis	ABS(B _{OP} - B _{RP})		50		Gauss

11. Application Circuit


<Typical>

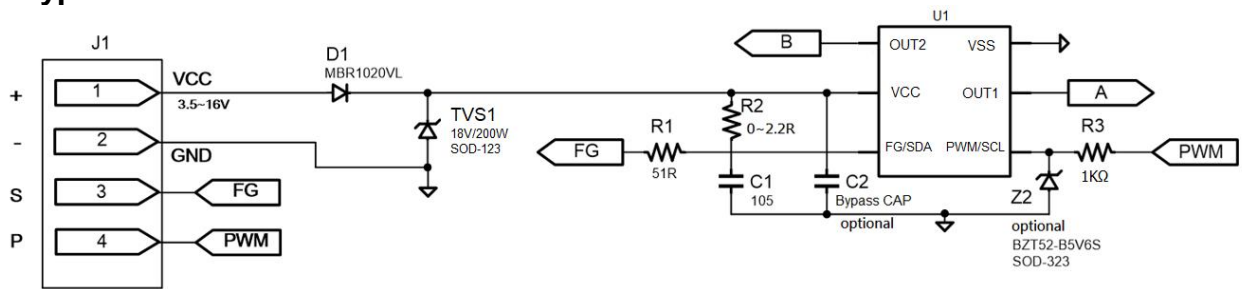

Note :


1. (IMPORTANT) C2 must be placed as close as possible to VCC pin.
2. Z2 is optional. It can be removed if PWM input voltage will not exceed to 5.5V.
3. R1 and R3 are for ESD protection.
4. The value of R3 will affect V_{PWMH} and V_{PWML} of PWM.

12. I/O Equivalent Circuit

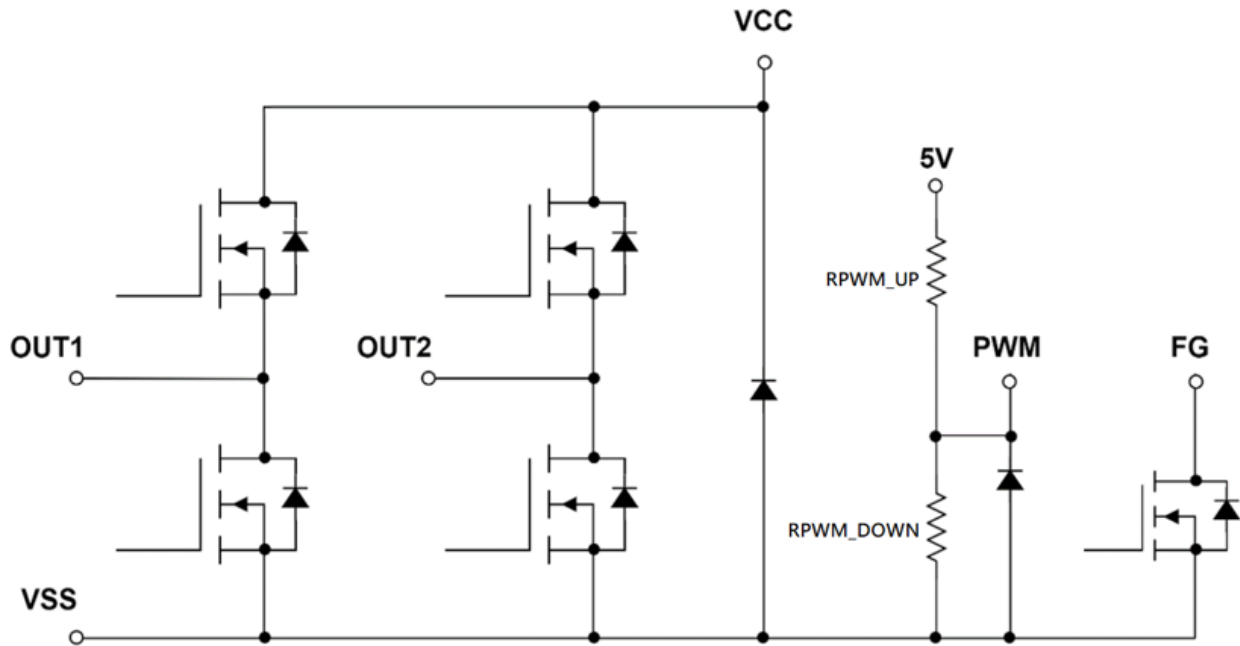

13. Package Information


TSOT23-6L Dimensions

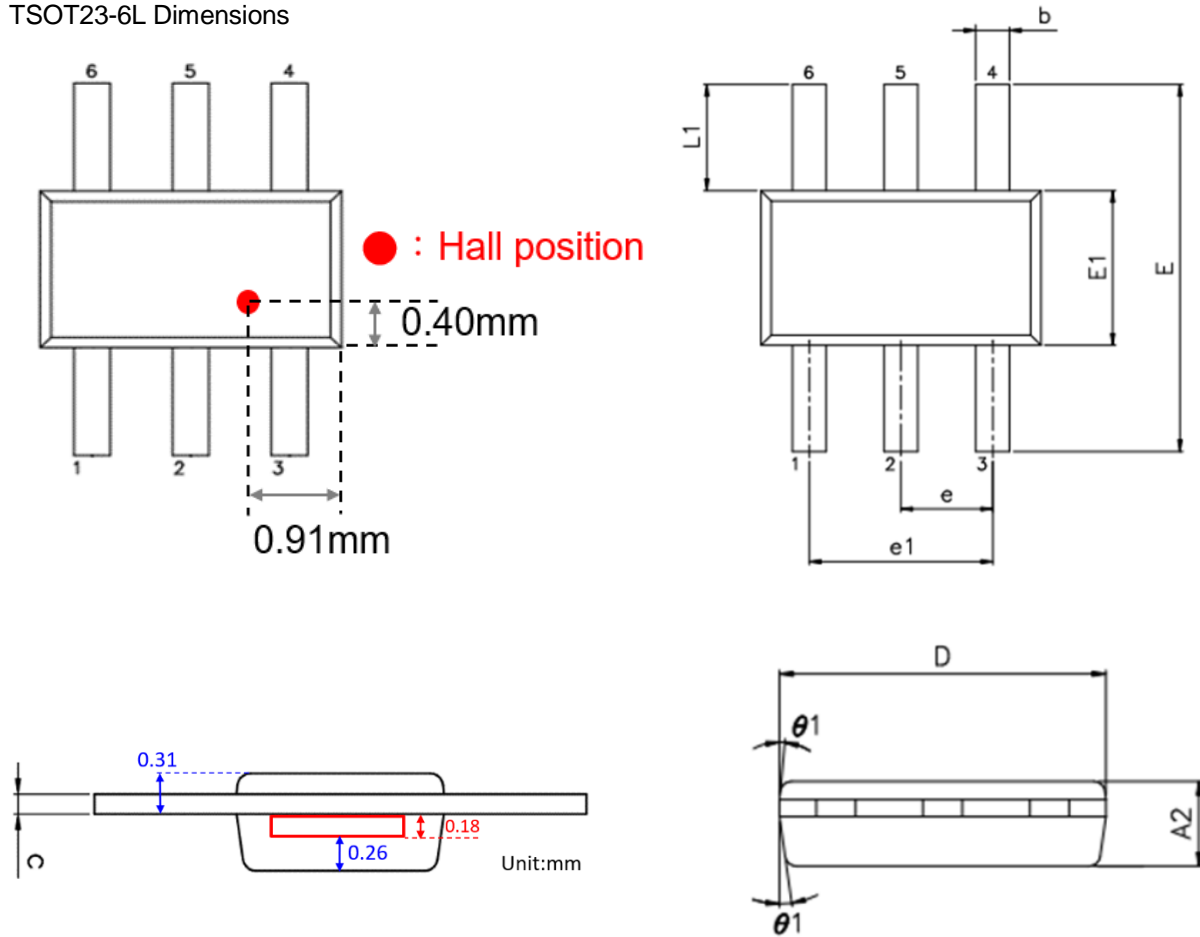


SYMBOL	Dimension in mm		
	MIN.	NOM.	MAX.
A2	0.70	0.75	0.80
b	0.35	-	0.50
c	0.08	-	0.20
D	2.80	2.90	3.02
E	3.60	3.80	4.00
E1	1.50	1.60	1.70
e	0.95 BSC		
e1	1.90 BSC		
L1	1.10 REF		
θ_1	4°	10°	12°

14. Tape and Reel Information


Tape

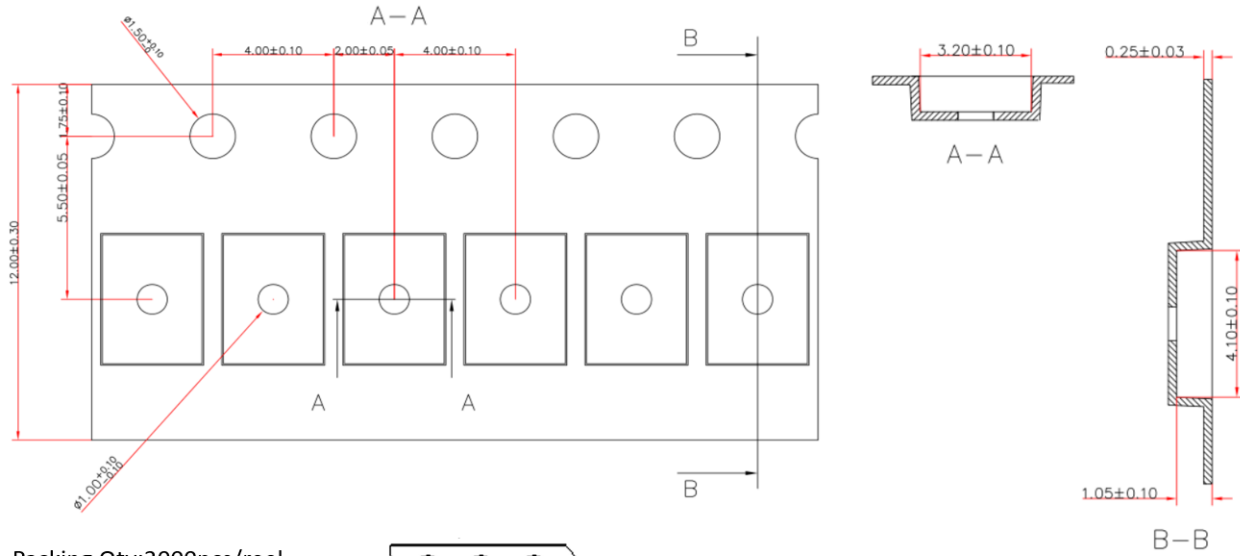

Packing Qty:3000pcs/reel
 Trailer Tape Length:400mm
 Leader Tape Length:400mm



Reel

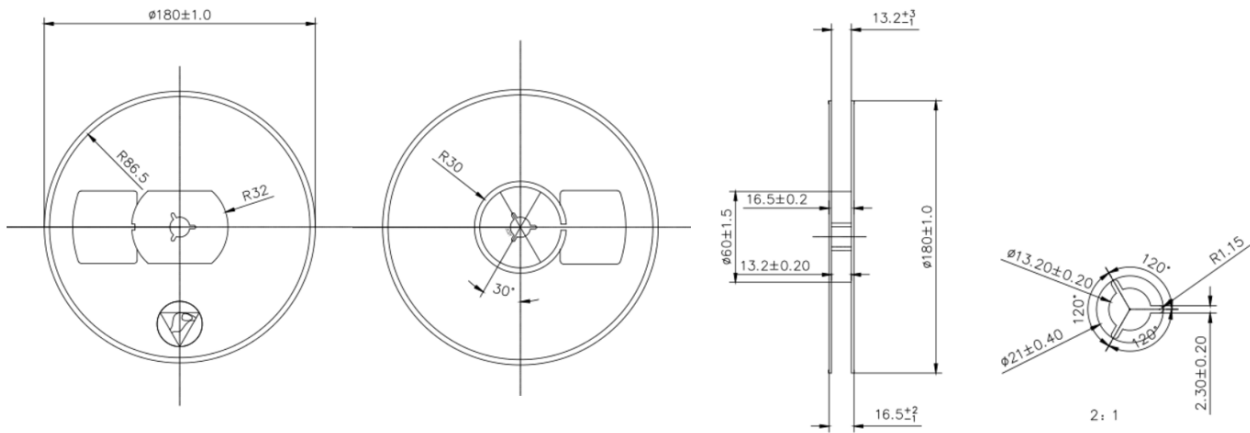

COLOR:Blue

Important Notice

1. inergy Technology Inc. reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.
2. The Products of inergy Technology Inc. have been tested, verified and passed by our specifications and standards, and are 100% inspected before delivery from the factory. It is strongly recommended that the customers shall perform verifications of the functionality, compatibility, and reliability of the environment or platform that you used. inergy Technology Inc. would not be liable for or guarantee anything that is related to the functionality, compatibility, and reliability of the environment or platform used by the customers.